



ISRAEL TESTING LABORATORIES
Global Certifications You Can Trust



TESTING CERT NO.1152.01
LAB ACCREDITED TO ISO/IEC 17025

CERTIFICATE OF COMPLIANCE

Page 1 of 2

Certificate No.

K106481.00

Date of Issue.

11/12/2011

Applicant Name

RADWARE Ltd.

Applicant Address

22 Raul Wallenburg St., Tel-Aviv, 61131, Israel

Product

Network Switch

Model / Type Ref.

ODS3-XL With Redundant 500W AC Power Supply (See Notes on following page).

Rating

500W

Tested to

FCC Part 15, Subpart B, Class A

Test Results are detailed in the Test Report No.

E106481.00

This is to certify that the product specified herein has been tested & the test results were found compliant with the requirements noted above.


Certification Dept.



ISRAEL TESTING LABORATORIES
Global Certifications You Can Trust



TESTING CERT NO.1152.01
LAB ACCREDITED TO ISO/IEC 17025

Page 2 of 2

CERTIFICATE OF COMPLIANCE

Notes:

See customer's declaration dated 04 July 2010 in ITL test report no. E106481.00 for
additional model names.



EMC Test Certificate

Certificate No

K100445.00

Page

1

Date of Issue

27 March 2010

Applicant**RADWARE Ltd.**
22 Raul Wallenberg St., Tel-Aviv, 61131, Israel**Tested to**

FCC Part 15, Sub-part B, Class A

Note: Test was performed between 30 December 2009 and 18 January 2010.

E.U.T. Network Switch

Model: OnDemand Switch 3-XL DC*

Serial No.: 21902462

* See additional model names on following page.

This is to certify that the product specified herein has been tested and found compliant with the requirements noted above.

Signature: _____

D. Yadidi
EMC Test Engineer

ITL091 Rev 1.7 26/06/07

Signature: _____

I. Raz
EMC Laboratory Manager

I.T.L (PRODUCT TESTING) Ltd.

PRODUCT SAFETY, EMC & TELECOMS LAB.

Bat-Sheva St., POB 87 LOD 71100 ISRAEL Tel. 972-8-9153100 Fax. 972-8-9153101

Email: standard@itl.co.il, Web Site: <http://www.itl.co.il>



EMC Test Certificate

Certificate No

Page

Date of Issue

K100445.00

2

27 March 2010

RODS3-DEFDUDC-ND
RODS3XL-DEFDUDC
RODS3-ALT2DC
RODS3-NEBS
RODS3XL-ALT2DC
RODS3XL-NEBS
RODS3XL-S1-2DC
RODS3XL-S2N-2DC
ODS3 v. 2 DC
LinkProof DC
AppDirector DC
AppDirector XL DC
AppWall DC
AppXcel DC
AppXML DC
SIP Director DC
Alteon 5412 DC
Alteon 5412 XL DC
InFlight DC
Virtual Director DC
APSolute Vision DC
DefensePro DC
Content Inspection Director (CID) DC
OnDemand Switch 3 v.2 DC
OnDemand Switch 3 XL DC



Note: See customer's declaration dated 04 July 2010 in ITL test report no. E100445.00.

I.T.L (PRODUCT TESTING) Ltd.

PRODUCT SAFETY, EMC & TELECOMS LAB.

Bat-Sheva St., POB 87 LOD 71100 ISRAEL Tel. 972-8-9153100 Fax. 972-8-9153101

Email: standard@itl.co.il, Web Site: <http://www.itl.co.il>



ISRAEL TESTING LABORATORIES
Global Certifications You Can Trust



DATE: 25 December 2011

I.T.L. (PRODUCT TESTING) LTD.

FCC EMC Test Report

**(Equipment Authorization Under FCC Verification Process)
for**

RADWARE Ltd.

Equipment under test:

Network Switch

**ODS3-XL With Redundant 500W AC
Power Supply***

* See customer's declaration on page 4.

Written by: _____

Y. Raz, Documentation

Approved by: _____

Y. Mordukhovitch, Test Engineer

Approved by: _____

I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of
I.T.L. (Product Testing) Ltd. This report relates only to items tested.

TABLE OF CONTENTS

1.	GENERAL INFORMATION -----	3
1.1	Administrative Information	3
1.2	Abbreviations and Symbols	5
1.3	List of Accreditations	6
2.	APPLICABLE DOCUMENTS -----	7
3.	TEST SITE DESCRIPTION -----	8
3.1	Location:	8
3.2	Open Site:	8
3.3	Ground Plane:	8
3.4	Antenna Mast:	8
3.5	Turntable:	8
3.6	EMI Receiver:	8
3.7	E.U.T. Support:	8
3.8	Test Equipment:	8
4.	SYSTEM TEST CONFIGURATION -----	9
4.1	Mode of Operation	9
4.2	Equipment Modifications	9
5.	SUMMARY OF TEST RESULTS -----	10
6.	EQUIPMENT UNDER TEST (E.U.T.) DESCRIPTION -----	11
7.	LIST OF TEST EQUIPMENT -----	14
7.1	Emission Tests	14
8.	CONDUCTED EMISSION FROM AC MAINS -----	15
8.1	Test Specification	15
8.2	Test Procedure	15
8.3	Test Results	15
9.	RADIATED EMISSION -----	20
9.1	Test Specification	20
9.2	Test Procedure	20
9.3	Test Results	21
10.	SET UP PHOTOGRAPHS -----	24
11.	SIGNATURES OF THE E.U.T'S TEST ENGINEERS -----	25
12.	APPENDIX A - CORRECTION FACTORS -----	26
12.1	Correction factors for CABLE	26
12.2	Correction factors for Amplifier 8447F 30M-1.3G GAIN	27
12.3	Correction factors for Bilog ANTENNA	28
12.4	Correction factors for Horn ANTENNA	29
13.	APPENDIX B - MEASUREMENT UNCERTAINTY -----	30
13.1	Radiated Emission	30
13.2	Conducted Emission	30
14.	APPENDIX C - FCC VERIFICATION PROCESS INSTRUCTIONS -----	31



1. General Information

1.1 Administrative Information

Manufacturer:	RADWARE Ltd.
Manufacturer's Address:	22 Raul Wallenberg St. Tel-Aviv Israel 61131 Tel: +972-3-766-8900 Fax: +972-3-766-8922
Manufacturer's Representative:	Yaniv Ben-Dor
Equipment Under Test (E.U.T):	Network Switch
Equipment Model No.:	ODS3-XL With Redundant 500W AC Power Supply (See customer's declaration on following page).
Equipment Serial No.:	Not designated
Date of Receipt of E.U.T:	30.10.2011
Start of Test:	30.10.2011
End of Test:	31.10.2011
Test Laboratory Location:	I.T.L (Product Testing) Ltd. 1 Batsheva St., Lod ISRAEL 71100
Test Specifications:	See Section 2



July 4th, 2010

Declaration of Similarity

I HEREBY DECLARE THAT THE FOLLOWING PRODUCTS:

RODS3-DEFAULT-ND
RODS3XL-DEFAULT
RODS3-ALTEON
RODS3XL-ALTEON
RODS3XL-S1-DEF
RODS3XL-S2N-DEF
ODS3 v. 2
AppDirector
AppDirector XL
LinkProof
AppWall
AppXcel
AppXML
SIP Director
Alteon 5412
Alteon 5412 XL
InFlight
Virtual Director
APSolute Vision
DefensePro
Content Inspection Director (CID)
OnDemand Switch 3 v.2
OnDemand Switch 3 XL

ARE IDENTICAL ELECTRONICALLY, PHYSICALLY, AND MECHANICALLY TO:

ODS3 -XL

Please relate to them all (from an EMC & safety point of view) as the same product.

Thank You,

Yaniv Ben-Dor
Engineering Manager
Radware Ltd.


Legal Signature

RADWARE Ltd.
22 Raoul Wallenberg
Tel-Aviv 69710
ISRAEL

1.2 Abbreviations and Symbols

The following abbreviations and symbols are applicable to this test report:

AC	alternating current
ARA	Antenna Research Associates
Aux	auxiliary
Avg	average
CDN	coupling-decoupling network
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
db μ V	decibel referred to one microvolt
db μ V/m	decibel referred to one microvolt per meter
DC	direct current
EMC	electromagnetic compatibility
E.U.T.	equipment under test
GHz	gigahertz
HP	Hewlett Packard
Hz	Hertz
kHz	kilohertz
kV	kilovolt
LED	light emitting diode
LISN	line impedance stabilization network
m	meter
mHn	millihenry
MHz	megahertz
msec	millisecond
N/A	not applicable
QP	quasi-peak
PC	personal computer
RF	radio frequency
RE	radiated emission
sec	second
V	volt



1.3 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 861911.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-3006, R-2729, T-1877, G-245.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025A-1.
6. TUV Product Services, England, ASLLAS No. 97201.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

2. Applicable Documents

- 2.1 **Code of Federal Regulations Title 47,
Federal Communications Commission
Part 15, Subpart B.
Rev. February 03, 2011
GPO Access Web Site** *Unintentional Radiators.*
- 2.2 **ANSI C63.4-2003** *American National Standards for
Methods of Measurement of Radio-
Noise Emissions from Low-Voltage
Electrical and Electronic Equipment
in the Range of 9 kHz to 40 GHz.*

3. Test Site Description

3.1 Location:

The Electromagnetic Compatibility Test Facility of I.T.L. (Product testing) Ltd. Is located at

Telrad Industrial Park, Lod, 71100 Israel.

Telephone: +972-8-9153100

Fax: +972-8-9153101

3.2 Open Site:

The OATS is located on a one floor-building roof. The OATS consists of 3 meter and 10 meter ranges, using a 21.5m X 8.5m solid metal ground plane, a remote controlled turntable and an antenna mast.

3.3 Ground Plane:

The ground plane is made from steel plates, which are welded continuously together. The Ground plane is lies and welded on welded steel construction with vias to allow for water drainage.

All the power, control, and signal lines to the turntable and the 3 m and 10m antenna mast outlets are routed in shielded conduits under the plane to the control building.

3.4 Antenna Mast:

ETS model 2070-2. The antenna position and polarization are remote controlled via Fiber Optical Link using ETS/EMCO Dual Controller Type 2090. The antenna position is adjustable between 1-4 meters. Pressurized air is used to power changing the polarity of the antenna.

3.5 Turntable:

ETS model 2087 series. The position of the turntable is remote-controlled via Fiber Optic Link, using ETS/EMCO Dual Controller Type 2090. The turntable is mounted in a pit and its surface is flush with the Open Site Ground Plane. Brushes near the periphery of the turntable ensure good conductive connection to the ground plane. The Turntable maximum load is 1250 Kg.

3.6 EMI Receiver:

Type HP8542E, including HP85420E R.F. filter manufactured by Hewlett-Packard, being in full compliance with CISPR 16 requirements.

3.7 E.U.T. Support:

Table mounted E.U.T.s are supported during testing on 80 cm high all-wooden tables (no metal nails or screws).

3.8 Test Equipment:

See details in Section 6.

4. System Test Configuration

4.1 Mode of Operation

The E.U.T. was operated by running a test software application.

The E.U.T. sends data frames between the ports. The frames are sent from:
Giga copper Port G1 to Giga Port G2, Giga copper Port G3 to Giga Port G4,
Giga copper Port G5 to Giga Port G6, Giga copper Port G7 to Giga Port G8,
Giga copper MNG1 to Giga Port MNG2.

The GBIC ports were connected by fiber cross cable in the following configurations:

SFP Port G9 to SFP Port G10.

SFP Port G11 to SFP Port G12.

XFP Port XG1 to XFP Port XG2

XFP Port XG3 to XFP Port XG4

If the data frames received after the complete loop between ports G1 and XG4,
on the screen of the auxiliary laptop, the following message appears for all ports at the end
of the defined test cycle (1min): PASSED

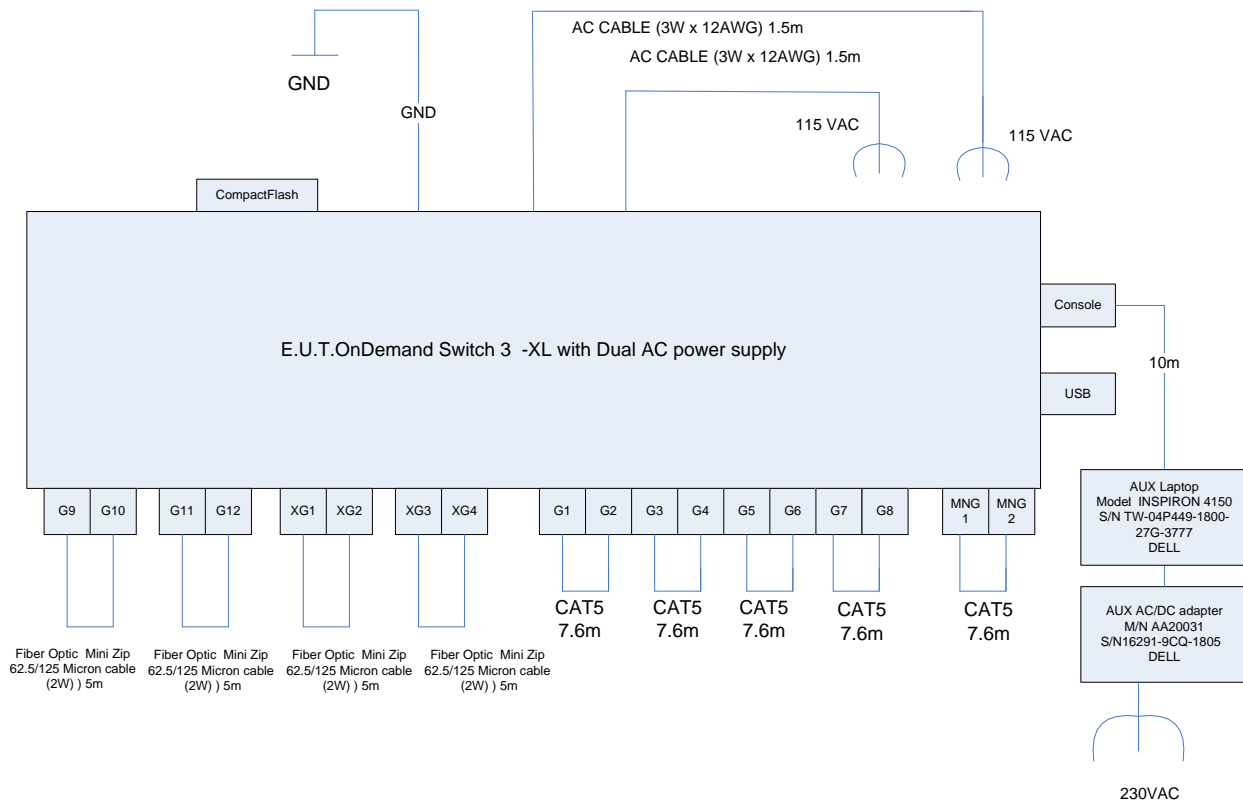


Figure 1. Configuration of Tested System

4.2 Equipment Modifications

No modifications were required in order to achieve compliance.

5. Summary of Test Results

Test	Results
Conducted Emissions FCC Part 15, Subpart B Class A	<p>The E.U.T met the performance requirements of the specification.</p> <p>The margin between the emission levels and the specification limit is, in the worst case, 19.1 dB for the phase line at 0.20 MHz and 17.4 dB at 0.20 MHz for the neutral line.</p>
Radiated Emissions FCC Part 15, Subpart B Class A	<p>The E.U.T met the performance requirements of the specification.</p> <p>The margin between the emission level and the specification limit is 3.5 dB in the worst case at the frequency of 3750.16 MHz, horizontal polarization.</p>

6. Equipment Under Test (E.U.T.) Description

OnDemand Switch™, Radware's next-generation hardware platform, delivers the breakthrough performance and superior scalability needed to effectively meet contemporary network and business needs. Specifically designed for the majority of enterprises and carriers that operate in dynamic, ever-changing environments and face diverse requirements, OnDemand Switch provides the extendable throughput they need from 0-20 Gbps for unparalleled scalability, business availability and performance. With OnDemand Switch you can add additional application-aware services on demand to meet new or changing application and infrastructure requirements without a compromise on performance. And, thanks to its one-click service and throughput upgrade capabilities, OnDemand Switch delivers both short-term and long-term savings on CAPEX and OPEX for full investment protection. OnDemand Switch represents a paradigm shift in the application delivery marketplace by providing customers with a new, cost effective and hassle-free upgrade standard.

On Demand Performance at All Throughput Requirements

As data-center complexity increases in terms of servers, applications, technologies and capacity, and there are clear requirements from the network to be more application-aware and add more application intelligence and services, application delivery solutions need to meet these growing requirements with more sophisticated, powerful switching capabilities. OnDemand Switch delivers unmatched performance up to 20 Gbps of throughput. Thanks to its revolutionary, rock-solid architecture, OnDemand Switch provides the best application delivery performance at all throughput levels to support all layer 4-7 network requirements. Whenever your network faces heavier traffic loads and you business require higher throughput levels, OnDemand Switch still provides the best performance at all times.

On Demand Throughput and Service Scalability

OnDemand Switch meets business growth demand by enabling customers to scale up performance by increasing throughput without hardware replacements. Customers may start with a certain bandwidth requirement to meet their current business needs, and later on, when the business grows, scale without a forklift upgrade. Customers can upgrade from as little as 200 Mbps all the way to 4 Gbps and from 8 Gbps all the way to 20 Gbps

by using the same hardware platform. As a result, you can meet all your business growth needs, improve uptime and meet SLA for your mission critical applications. Consequently, not only are business requirements met, but it is accomplished with a simple license upgrade.

Armed with Radware's APSolute OS "application aware" functionality, OnDemand Switch offers the broadest functionality in the application delivery market. You can add additional, advanced services by simply applying a new license. The APSolute OS service architecture extends:

- Health monitoring and traffic redirection capabilities for real-time identification of service failures
- Load balancing for optimized management of traffic flows across the enterprise
- Bandwidth management for policy-driven service prioritization
- Application acceleration for offloading servers and optimizing content delivery through SSL offloading, TCP multiplexing, compression and caching
- Intrusion prevention and DoS protection to safeguard networks and resources
- Application performance monitoring to analyze real-time traffic and pinpoint performance degradations.

OnDemand Switch delivers a wide range of APSolute advanced services addressing data-centers' most prominent challenges, with no compromise on performance.

On Demand Investment Protection

OnDemand Switch provides seamless scalability during on-going IT operations. Typically, scaling up an infrastructure implies hardware replacements. No more. OnDemand Switch provides a hassle-free upgrade with no downtime, eliminating large-scale upgrade projects that are required every time you max out the capacity of your switches. OnDemand Switch eliminates the need to design, test, stage, install and debug a new hardware device, thus significantly reducing the high costs and time typically associated with scaling your environment. Thanks to its throughput and services scalability, OnDemand Switch dramatically extends the life-time of the hardware platform. By leveraging the extendable throughput license, your infrastructure investment is protected as you pay only for the performance you need today and easily scale when you need more. As a result, there is also no need to pay up front for future capacity needs. This provides you with superior cost effectiveness and lowers your overall total cost of ownership (TCO).

On Demand Operations Simplicity

OnDemand Switch reduces data center operations complexity and related costs thanks to its hassle-free scalability, outstanding reliability and standard, unified platform that is suitable for all throughput levels. Therefore, the entire operational environment can be standardized on one type of switching platform resulting in more efficient operational processes. This also generates significant savings in terms of training and the inventory carried for spare and backup devices.

Additional Benefits

Carrier-Grade Reliability

OnDemand Switch delivers carrier-grade reliability and performance required by the most demanding carrier application environments. It features a reliable, custom-made hardware coupled with embedded components providing high MTBF. OnDemand Switch is NEBS ready and it also complies with the strictest regulations and is certified by the most up-to-date hardware standards. In addition, OnDemand Switch provides dependable, dual AC/DC power supply.

Guaranteed Availability & Secured Management

OnDemand Switch provides continuous guaranteed availability of remote management even under extreme utilization conditions. As the two redundant management ports use a separate, out-of-band management data path, the management traffic is not affected by the data traffic. For enhanced security, the management ports are isolated from the traffic ports. Moreover, the management ports can work in a redundant mode for high availability.

Enhanced Configuration

OnDemand Switch allows for easy installation, recovery and upgrade of its software as well as configuration back-up for enhanced management. It also features a convenient LCD Panel for display of key performance statistics.

On Demand Innovation

OnDemand Switch Layer 4-7 operations are powered by a state-of-the-art hardware architecture for optimized resource utilization, maximum application performance, top reliability and superior manageability.

The E.U.T. was tested with power supply M/N MRW-5500V4V, manufactured by ZIPPY.

The E.U.T. includes the following changes:

PCB layout changes in motherboard and 4SFP daughter board.

7. List of Test Equipment

7.1 Emission Tests

The equipment indicated below by an “X” was used for testing Conducted Emission (CE) and Radiated Emission (RE)

Test equipment calibration is in accordance with ITL Q.A. Procedure PM 110 "Calibration Control Procedure", which complies with ISO 9002 and ISO/IEC Guide 17025.

Instrument	Manufacturer	Model	Serial No.	Used in Test	
				CE	RE
LISN	EMCO	3810/2BR	1297	X	
Transient Limiter	HP	11947A	3107A03041	X	
RF Amplifier	HP	8447F	3113A06386		X
Current Probe	FCC	F51	163	X	
EMI Receiver	HP	8546A	3650A00365	X	X
Receiver RF Filter Section	HP	85460A	3650A00365	X	X
EMC Analyzer	HP	HP8593	3536A00120		X
Biconilog Antenna	EMCO	3142B	1250		X
Horn Antenna	ETS	3115	6142		X
Antenna Mast	ETS	2070-2	9608-1497		X
Turntable	ETS	2087	-		X
Mast & Table Controller	ETS/EMCO	2090	9608-1456		X

8. Conducted Emission From AC Mains

8.1 Test Specification

0.15 - 30 MHz, FCC Part 15, Subpart B, CLASS A

8.2 Test Procedure

The E.U.T operation mode and test setup are as described in Section 4.1. In order to minimize background noise interference, the conducted emission testing was performed inside a shielded room (see Section 3), with the E.U.T placed on a 0.4 meter high wooden table. In the case of a floor-standing E.U.T., it was placed on the horizontal ground plane.

The E.U.T was powered from 115 V AC / 60 Hz via 50 Ohm / 50 μ Hn Line Impedance Stabilization Network (LISN) on the phase and neutral lines. The LISN's were grounded to the shielded room ground plane (floor), and were kept at least 0.8 meters from the nearest boundary of the E.U.T

The center of the E.U.T.'s AC cable was folded back and forth, in order to form a bundle less than 0.40 meters and a total cable length of 1 meter.

The effect of varying the position of the cables was investigated to find the configuration that produces maximum emission. The configuration tested is shown in the photograph, *Figure 8. Conducted Emission From AC Mains Test.*

The emission voltages at the LISN's outputs were measured using a computerized receiver, complying to CISPR 16 requirements. The specification limits are loaded to the receiver via a 3.5" floppy disk and are displayed on the receiver's spectrum display.

A frequency scan between 0.15 and 30 MHz was performed at 9 kHz I.F. band width, using peak detection.

The spectral components having the highest level on each line were measured using a quasi-peak and average detector.

8.3 Test Results

The E.U.T met the requirements of the FCC Part 15, Subpart B, Class A specification.

The margin between the emission levels and the specification limit is, in the worst case, 19.1 dB for the phase line at 0.20 MHz and 17.4 dB at 0.20 MHz for the neutral line.

The details of the highest emissions are given in *Figure 2 to Figure 5.*

Conducted Emission

E.U.T Description Network Switch
Type ODS3-XL With Redundant
 500W AC Power Supply
Serial Number: Not designated

Specification: FCC Part 15, Subpart B, Class A

Lead: Phase

Detectors: Peak, Quasi-peak, Average

Signal Number	Frequency (MHz)	Peak (dBuV)	QP (dBuV)	QP Delta L 1 (dB)	Avg (dBuV)	Av Delta L 2 (dB)
1	0.206230	55.0	51.6	-27.4	46.9	-19.1
2	0.277049	50.7	48.7	-30.3	43.8	-22.2
3	0.344564	49.5	47.7	-31.3	41.2	-24.8
4	0.411881	45.9	43.9	-35.1	40.8	-25.2
5	0.480838	47.2	46.3	-32.7	40.8	-25.2
6	0.503750	36.6	34.3	-38.7	32.9	-27.1
7	0.549745	40.2	38.0	-35.0	32.3	-27.7

Figure 2. Detectors: Peak, Quasi-peak, Average

Note: QP Delta/Av Delta refer to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description Network Switch
Type ODS3-XL With Redundant
 500W AC Power Supply
Serial Number: Not designated

Specification: FCC Part 15, Subpart B, Class A

Lead: Phase

Detectors: Peak, Quasi-peak, Average



16:22:22 SEP 27, 2000 10:33:41 JUL 23, 2001

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKA 210 kHz
53.55 dBμV

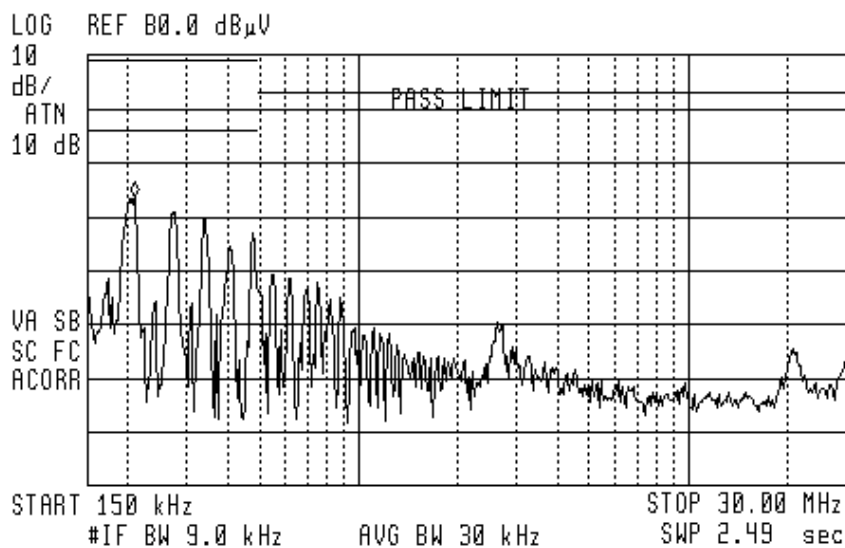


Figure 3 PHASE

Detectors: Peak, Quasi-peak, Average

Conducted Emission

E.U.T Description Network Switch
Type ODS3-XL With Redundant
 500W AC Power Supply
Serial Number: Not designated

Specification: FCC Part 15, Subpart B, Class A

Lead: Neutral

Detectors: Peak, Quasi-peak, Average

Signal Number	Frequency (MHz)	Peak (dBuV)	QP (dBuV)	QP Delta L 1 (dB)	Avg (dBuV)	Av Delta L 2 (dB)
1	0.206230	56.8	53.3	-25.7	48.6	-17.4
2	0.277049	51.7	49.8	-29.2	44.9	-21.1
3	0.344564	50.6	48.8	-30.2	42.4	-23.6
4	0.411881	47.2	45.2	-33.8	42.1	-23.9
5	0.480838	48.4	47.7	-31.3	42.1	-23.9
6	0.503750	39.6	37.1	-35.9	35.4	-24.6
7	0.549745	41.5	39.3	-33.7	33.6	-26.4

Figure 4. Detectors: Peak, Quasi-peak, Average

Note: QP Delta/Av Delta refer to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description Network Switch
Type ODS3-XL With Redundant
 500W AC Power Supply
Serial Number: Not designated

Specification: FCC Part 15, Subpart B, Class A

Lead: Neutral

Detectors: Peak, Quasi-peak, Average



16:22:22 SEP 27, 2000 10:33:41 JUL 23, 2001

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKA 200 kHz
55.53 dBμV

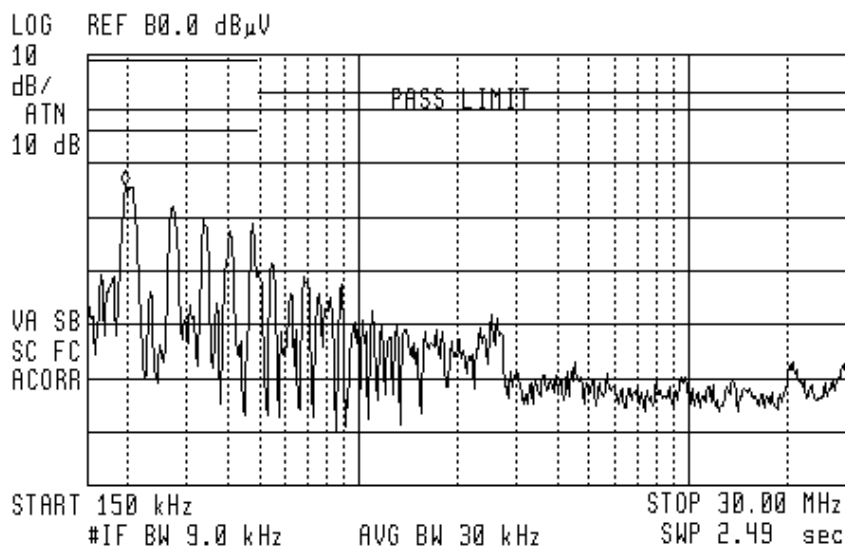


Figure 5 NEUTRAL

Detectors: Peak, Quasi-peak, Average

9. Radiated Emission

9.1 Test Specification

30-12500 MHz, FCC Part 15, Subpart B, CLASS A

9.2 Test Procedure

The E.U.T operation mode and test set-up are as described in section 4.1.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The effect of varying the position of the cables was investigated to find the configuration that produces maximum emission. The configuration tested is shown in *Figure 9. Radiated Emission Test*.

The E.U.T. highest frequency source or used frequency is 2.5 GHz.

The frequency range 30-12500 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 – 12.5 GHz, a spectrum analyzer including a low noise amplifier was used. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.

The field strength is calculated directly by the EMI Receiver software, and a “Correction Factors” data disk, using the following equation:

$$FS = RA + AF + CF$$

Where:

FS: Field strength [dB μ V/m]

RA: Receiver Amplitude [dB μ V]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

9.3 Test Results

The E.U.T met the requirements of the FCC Part 15, Subpart B ,Class A specification.

The margin between the emission level and the specification limit is 3.5 dB in the worst case at the frequency of 3750.16 MHz, horizontal polarization.

The details of the highest emissions are given in *Figure 6* to *Figure 7*.

Radiated Emission

E.U.T Description Network Switch
Type ODS3-XL With Redundant
 500W AC Power Supply
Serial Number: Not designated

Specification: FCC Part 15, Subpart B, Class A

Antenna Polarization: Horizontal/Vertical
Antenna: 3 meters distance

Frequency range: 30 MHz to 1000 MHz
Detectors: Peak, Quasi-peak

Frequency	QP Amp	Antenna Polarization:		Limit	Margin
(MHz)	dBμV/m	Hor.	Ver.	dBμV/m	(dB)
84.04	41.1	X		49.5	-8.4
54.72	31.0	X		49.5	-18.5
125.00	35.0	X		54.0	-19.0
147.09	40.5	X		54.0	-13.5
250.00	40.4	X		56.9	-16.5
500.04	42.6	X		56.9	-14.3
700.00	36.5	X		56.9	-20.4
51.04	38.5		X	49.5	-11.0
48.82	40.0		X	49.5	-9.5
55.06	38.9		X	49.5	-10.6
56.87	38.6		X	49.5	-10.9
125.00	38.1		X	54.0	-15.9
250.00	42.6		X	56.9	-14.3
700.01	46.1		X	56.9	-10.8

**Figure 6. Radiated Emission. Antenna Polarization: HORIZONTAL/VERTICAL.
Detectors: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Radiated Emission

E.U.T Description Network Switch
Type ODS3-XL With Redundant
 500W AC Power Supply
Serial Number: Not designated

Specification: FCC Part 15, Subpart B, Class A

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 12.5 GHz
Antenna: 3 meters distance Detectors: Peak, Average

Frequency	Peak Amp	Avg Amp	Antenna Polarization:		Limit	Margin
(MHz)	dB μ V/m	dB μ V/m	Hor.	Ver.	dB μ V/m	(dB)
1250.00	64.5		X		80.0	-15.5
1250.00		52.0	X		60.0	-8.0
3750.16	64.6		X		80.0	-15.4
3750.16		56.5	X		60.0	-3.5
1250.00	58.3			X	80.0	-21.7
1250.00		49.5		X	60.0	-10.5
3125.14	56.3			X	80.0	-23.7
3125.14		47.7		X	60.0	-12.3

**Figure 7. Radiated Emission. Antenna Polarization: HORIZONTAL/VERTICAL.
Detectors: Peak, Average**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

10. Set Up Photographs





Figure 8. Conducted Emission From AC Mains Test



Figure 9. Radiated Emission Test



11. Signatures of the E.U.T's Test Engineers

Test	Test Engineer Name	Signature	Date
Conducted Emissions	Y. Mordukhovitch		29.12.11
Radiated Emissions	Y. Mordukhovitch		29.12.11

12. APPENDIX A - CORRECTION FACTORS

12.1 Correction factors for

CABLE

from EMI receiver
to test antenna
at 3 AND 10 meter range.

FREQUENCY	CORRECTION FACTOR		FREQUENCY	CORRECTION FACTOR
(MHz)	(dB)		(MHz)	(dB)
30	1.96		700	11.25
35	2.08		800	12.53
40	2.26		900	13.86
45	2.43		1000	14.86
50	2.59		1200	15.7
55	2.65		1400	17.05
60	2.86		1600	18.2
65	2.96		1800	19.4
70	3.04		2000	21.3
75	3.27			
80	3.41			
85	3.54			
90	3.68			
95	3.77			
100	3.93			
110	4.19			
120	4.41			
130	4.6			
140	4.83			
150	5.06			
160	5.35			
170	5.57			
180	5.7			
190	5.84			
200	6.02			
250	6.86			
300	7.59			
350	8.09			
400	8.7			
450	9.15			
500	9.53			
550	9.82			
600	10.24			
650	10.74			

NOTES:

1. The cable type is **RG-214/U**



12.2 Correction factors for GAIN

Amplifier 8447F 30M-1.3G

FREQUENCY (MHz)	GAIN (dB)
20	27.16
30	27.18
50	27.15
100	27.01
200	26.48
500	27.54
1000	26.96
1100	26.69
1200	26.28
1300	25.85

12.3 Correction factors for

Bilog ANTENNA

Model: 3142

Antenna serial number: 1250

3 meter range

FREQUENCY	AFE	FREQUENCY	AFE
(MHz)	(dB/m)	(MHz)	(dB/m)
30	18.4	1100	25
40	13.7	1200	24.9
50	9.9	1300	26
60	8.1	1400	26.1
70	7.4	1500	27.1
80	7.2	1600	27.2
90	7.5	1700	28.3
100	8.5	1800	28.1
120	7.8	1900	28.5
140	8.5	2000	28.9
160	10.8		
180	10.4		
200	10.5		
250	12.7		
300	14.3		
400	17		
500	18.6		
600	19.6		
700	21.1		
800	21.4		
900	23.5		
1000	24.3		

12.4 Correction factors for

Horn ANTENNA

Model: 3115

Antenna serial number: 6142

3 meter range

FREQUENCY	Antenna Factor	FREQUENCY	Antenna Factor
(MHz)	(dB/m)	(MHz)	(dB/m)
1000	23.9	10500	38.4
1500	25.4	11000	38.5
2000	27.3	11500	39.4
2500	28.5	12000	39.2
3000	30.4	12500	39.4
3500	31.6	13000	40.7
4000	33	14000	42.1
4500	32.7	15000	40.1
5000	34.1	16000	38.2
5500	34.5	17000	41.7
6000	34.9	17500	45.7
6500	35.1	18000	47.7
7000	35.9		
7500	37.5		
8000	37.6		
8500	38.3		
9000	38.5		
9500	38.1		
10000	38.6		

13. APPENDIX B - MEASUREMENT UNCERTAINTY

13.1 Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for
open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.96 dB

13.2 Conducted Emission

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)
0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.44 dB

14. Appendix C - FCC Verification Process Instructions

- Label

Prepare Label

- Design a FCC compliance label that will be affixed to all units marketed.
- The label must include the compliance statement below.

Example of Label:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Note - The label may also contain other information, such as the model number, the country of origin, etc. (The country of origin information is required by Customs and the Federal Trade Commission for imports to the U.S.)

Small Products:

If the product is too small for a label containing the statement above, the information paragraph required must be placed in a prominent location in the instruction manual or, alternatively, the information can be placed on the container in which the product is marketed.


- **Label**

The FCC requires that the compliance statement above be placed in a “conspicuous location on the device.”

The following are the FCC Rules about how the label will be permanently attached.:

The label is expected to last the life of the product. It must be permanently marked (etched, engraved, indelibly printed, etc.) either directly on the device, or on a tag that is permanently affixed (riveted, welded, etc.) to the device.

Example of Product with Label:

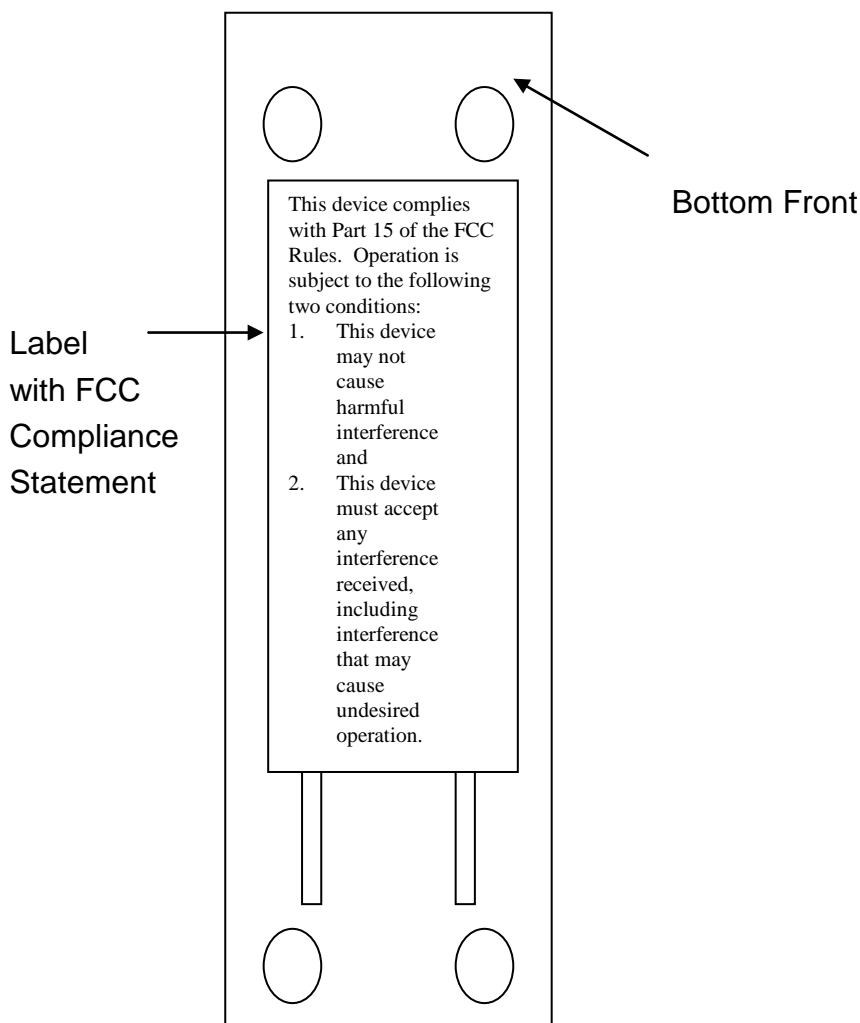

- **FCC Compliance Statement**

FCC Compliance Statement in User's Manual

For a Class A or Class B digital device or peripheral, the instructions given to the user shall include the following, or a similar, statement that should be placed in a prominent location in the text of the manual. (from FCC Rules 15.105)

The user's manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. (from FCC Rules 15.21)

Information about any special accessories needed to ensure FCC compliance must also be included.

Sample User Information for a Class A digital device:

The FCC Wants You to Know

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.

FCC Warning

Modifications not expressly approved by the manufacturer could void the user authority to operate the equipment under FCC Rules.

Sample User Information for a Class B digital device:

The FCC Wants You to Know

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- a) Reorient or relocate the receiving antenna.
- b) Increase the separation between the equipment and receiver.
- c) Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- d) Consult the dealer or an experienced radio/TV technician.

FCC Warning

Modifications not expressly approved by the manufacturer could void the user authority to operate the equipment under FCC Rules.

DATE: 27 July 2010

I.T.L. (PRODUCT TESTING) LTD.

FCC EMC Test Report

**(Equipment Authorization Under FCC Verification Process)
for**

RADWARE Ltd.

Equipment under test:

Network Switch

OnDemand Switch 3-XL DC*

* See customer's declaration on page 4.

Written by: _____

Y. Raz, Documentation

Approved by: _____

D. Yadidi, Test Engineer

Approved by: _____

I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of
I.T.L. (Product Testing) Ltd. This report relates only to items tested.

TABLE OF CONTENTS

1.	GENERAL INFORMATION-----	3
1.1	Administrative Information.....	3
1.2	Abbreviations and Symbols.....	5
1.3	List of Accreditations	6
2.	APPLICABLE DOCUMENTS -----	7
3.	TEST SITE DESCRIPTION -----	8
3.1	Location:.....	8
3.2	Open Site:	8
3.3	Ground Plane:.....	8
3.4	Antenna Mast:	8
3.5	Turntable:	8
3.6	EMI Receiver:	8
3.7	E.U.T. Support:	8
3.8	Test Equipment:	8
4.	SYSTEM TEST CONFIGURATION-----	9
4.1	Mode of Operation	9
4.2	Equipment Modifications	10
5.	SUMMARY OF TEST RESULTS-----	11
6.	EQUIPMENT UNDER TEST (E.U.T.) DESCRIPTION -----	12
7.	LIST OF TEST EQUIPMENT-----	15
7.1	Emission Tests.....	15
8.	RADIATED EMISSION -----	16
8.1	Test Specification	16
8.2	Test Procedure.....	16
8.3	Test Results	17
9.	SET UP PHOTOGRAPHS -----	19
10.	SIGNATURES OF THE E.U.T'S TEST ENGINEERS -----	20
11.	APPENDIX A - CORRECTION FACTORS -----	21
11.1	Correction factors for CABLE	21
11.2	Correction factors for Amplifier 8447F 30M-1.3G GAIN.....	22
11.3	Correction factors for Bilog ANTENNA	23
11.4	Correction factors for Horn ANTENNA.....	24
12.	APPENDIX B - MEASUREMENT UNCERTAINTY -----	25
12.1	Radiated Emission.....	25
12.2	Conducted Emission.....	25
13.	APPENDIX C - FCC VERIFICATION PROCESS INSTRUCTIONS-----	26

1. General Information

1.1 Administrative Information

Manufacturer:	RADWARE Ltd.
Manufacturer's Address:	22 Raul Wallenberg St. Tel-Aviv Israel 61131 Tel: +972-3-766-8900 Fax: +972-3-766-8922
Manufacturer's Representative:	Yaniv Ben-Dor
Equipment Under Test (E.U.T):	Network Switch
Equipment Model No.:	OnDemand Switch 3-XL DC (See customer's declaration on following page)
Equipment Serial No.:	21902462
Date of Receipt of E.U.T:	29.12.2009
Start of Test:	30.12.2009
End of Test:	18.01.2010
Test Laboratory Location:	I.T.L (Product Testing) Ltd. 1 Batsheva St., Lod ISRAEL 71100
Test Specifications:	See Section 2



July 4th , 2010

Declaration of Similarity

I HEREBY DECLARE THAT THE FOLLOWING PRODUCTS:

RODS3-DEFDUDC-ND
RODS3XL-DEFDUDC
RODS3-ALT2DC
RODS3-NEBS
RODS3XL-ALT2DC
RODS3XL-NEBS
RODS3XL-S1-2DC
RODS3XL-S2N-2DC
ODS3 v. 2 DC
LinkProof DC
AppDirector DC
AppDirector XL DC
AppWall DC
AppXcel DC
AppXML DC
SIP Director DC
Alteon 5412 DC
Alteon 5412 XL DC
InFlight DC
Virtual Director DC
APSolute Vision DC
DefensePro DC
Content Inspection Director (CID) DC
OnDemand Switch 3 v.2 DC
OnDemand Switch 3 XL DC


ARE IDENTICAL ELECTRONICALLY, PHYSICALLY, AND MECHANICALLY TO:

ODS3 -XL DC

Please relate to them all (from an EMC & safety point of view) as the same product.

Thank You,

Yaniv Ben-Dor
Engineering Manager
Radware Ltd.

 Legal Signature
RADWARE Ltd.
22 Raoul Wallenberg
Tel-Aviv 69710
ISRAEL

1.2 Abbreviations and Symbols

The following abbreviations and symbols are applicable to this test report:

AC	alternating current
ARA	Antenna Research Associates
Aux	auxiliary
Avg	average
CDN	coupling-decoupling network
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
db μ V	decibel referred to one microvolt
db μ V/m	decibel referred to one microvolt per meter
DC	direct current
EMC	electromagnetic compatibility
E.U.T.	equipment under test
GHz	gigahertz
HP	Hewlett Packard
Hz	Hertz
kHz	kilohertz
kV	kilovolt
LED	light emitting diode
LISN	line impedance stabilization network
m	meter
mHn	millihenry
MHz	megahertz
msec	millisecond
N/A	not applicable
QP	quasi-peak
PC	personal computer
RF	radio frequency
RE	radiated emission
sec	second
V	volt

1.3 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 861911.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-3006, R-2729.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025A-1.
6. TUV Product Services, England, ASLLAS No. 97201.
7. Nemko (Norway), Authorization No. ELA 207(b).

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

2. Applicable Documents

- | | | |
|-----|---|---|
| 2.1 | Code of Federal Regulations Title 47,
Federal Communications Commission
Part 15, Subpart B.
Rev. July 10, 2008 | <i>Unintentional Radiators.</i> |
| 2.2 | ANSI C63.4-2003 | <i>American National Standards for
Methods of Measurement of Radio-
Noise Emissions from Low-Voltage
Electrical and Electronic Equipment
in the Range of 9 kHz to 40 GHz.</i> |

3. Test Site Description

3.1 Location:

The Electromagnetic Compatibility Test Facility of I.T.L. (Product testing) Ltd. Is located at

Telrad Industrial Park, Lod, 71100 Israel.

Telephone: +972-8-9153100

Fax: +972-8-9153101

3.2 Open Site:

The OATS is located on a one floor-building roof. The OATS consists of 3 meter and 10 meter ranges, using a 21.5m X 8.5m solid metal ground plane, a remote controlled turntable and an antenna mast.

3.3 Ground Plane:

The ground plane is made from steel plates, which are welded continuously together. The Ground plane is lies and welded on welded steel construction with vias to allow for water drainage.

All the power, control, and signal lines to the turntable and the 3 m and 10m antenna mast outlets are routed in shielded conduits under the plane to the control building.

3.4 Antenna Mast:

ETS model 2070-2. The antenna position and polarization are remote controlled via Fiber Optical Link using ETS/EMCO Dual Controller Type 2090. The antenna position is adjustable between 1-4 meters. Pressurized air is used to power changing the polarity of the antenna.

3.5 Turntable:

ETS model 2087 series. The position of the turntable is remote-controlled via Fiber Optic Link, using ETS/EMCO Dual Controller Type 2090. The turntable is mounted in a pit and its surface is flush with the Open Site Ground Plane. Brushes near the periphery of the turntable ensure good conductive connection to the ground plane. The Turntable maximum load is 1250 Kg.

3.6 EMI Receiver:

Type HP8542E, including HP85420E R.F. filter manufactured by Hewlett-Packard, being in full compliance with CISPR 16 requirements.

3.7 E.U.T. Support:

Table mounted E.U.T.s are supported during testing on 80 cm high all-wooden tables (no metal nails or screws).

3.8 Test Equipment:

See details in Section 6.

4. System Test Configuration

4.1 Mode of Operation

The E.U.T. was operated by running a test software application.

The E.U.T. sends data frames between the ports. The frames are sent from:
Giga copper Port G1 to Giga Port G2, Giga copper Port G3 to Giga Port G4,
Giga copper Port G5 to Giga Port G6, Giga copper Port G7 to Giga Port G8,
Giga copper MNG1 to Giga Port MNG2.

The GBIC ports were connected by fiber cross cable in the following configurations:

SFP Port G9 to SFP Port G10.

SFP Port G11 to SFP Port G12.

XFP Port XG1 to XFP Port XG2

XFP Port XG3 to XFP Port XG4

If the data frames received after the complete loop between ports G1 and XG4,
on the screen of the auxiliary laptop, the following message appears for all ports at the end
of the defined test cycle (1min): PASSED

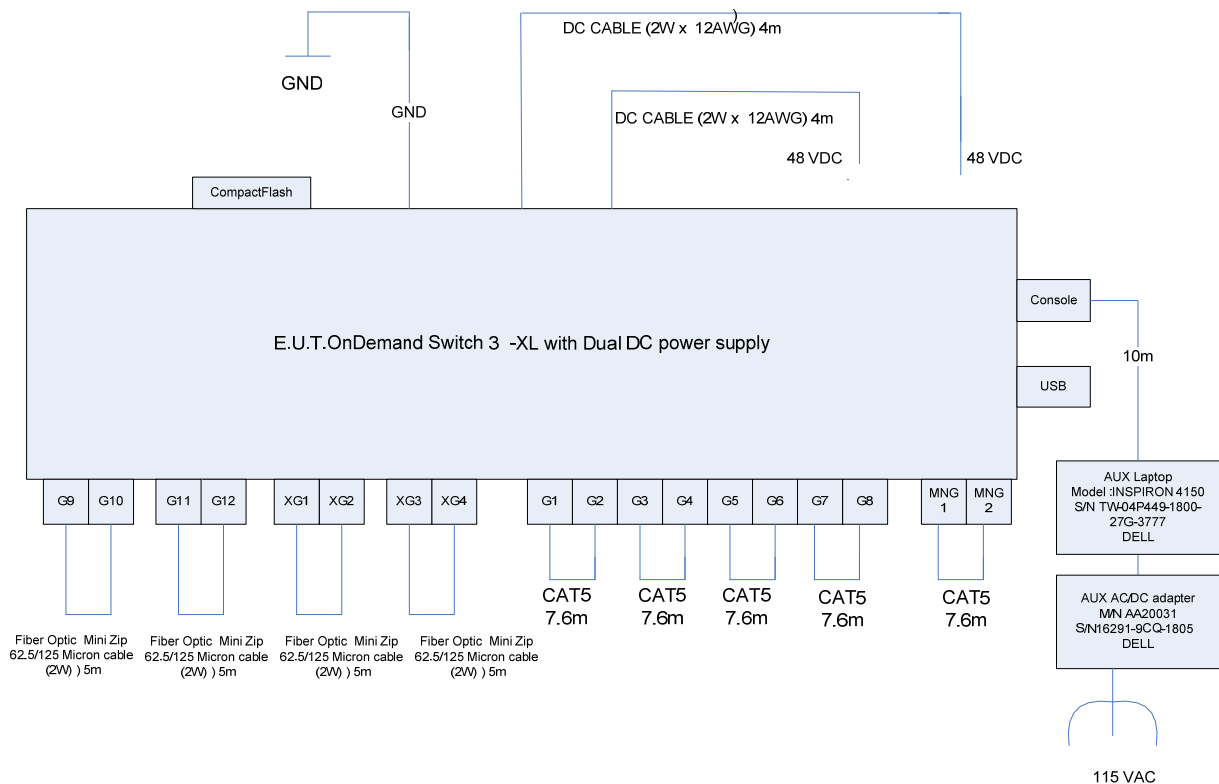


Figure 1. Configuration of Tested System

4.2 Equipment Modifications

No modifications were required in order to achieve compliance.

5. Summary of Test Results

Test	Results
Radiated Emissions FCC Part 15, Subpart B Class A	<p>The E.U.T met the performance requirements of the specification.</p> <p>The margin between the emission level and the specification limit is 5.4 dB in the worst case at the frequency of 80.00 MHz, horizontal polarization.</p>

6. Equipment Under Test (E.U.T.) Description

OnDemand Switch™, Radware's next-generation hardware platform, delivers the breakthrough performance and superior scalability needed to effectively meet contemporary network and business needs. Specifically designed for the majority of enterprises and carriers that operate in dynamic, ever-changing environments and face diverse requirements, OnDemand Switch provides the extendable throughput they need from 0-20 Gbps for unparalleled scalability, business availability and performance. With OnDemand Switch you can add additional application-aware services on demand to meet new or changing application and infrastructure requirements without a compromise on performance. And, thanks to its one-click service and throughput upgrade capabilities, OnDemand Switch delivers both short-term and long-term savings on CAPEX and OPEX for full investment protection. OnDemand Switch represents a paradigm shift in the application delivery marketplace by providing customers with a new, cost effective and hassle-free upgrade standard.

On Demand Performance at All Throughput Requirements

As data-center complexity increases in terms of servers, applications, technologies and capacity, and there are clear requirements from the network to be more application-aware and add more application intelligence and services, application delivery solutions need to meet these growing requirements with more sophisticated, powerful switching capabilities. OnDemand Switch delivers unmatched performance up to 20 Gbps of throughput. Thanks to its revolutionary, rock-solid architecture, OnDemand Switch provides the best application delivery performance at all throughput levels to support all layer 4-7 network requirements. Whenever your network faces heavier traffic loads and your business requires higher throughput levels, OnDemand Switch still provides the best performance at all times.

On Demand Throughput and Service Scalability

OnDemand Switch meets business growth demand by enabling customers to scale up performance by increasing throughput without hardware replacements. Customers may start with a certain bandwidth requirement to meet their current business needs, and later on, when the business grows, scale without a forklift upgrade. Customers can upgrade from as little as 200 Mbps all the way to 4 Gbps and from 8 Gbps all the way to 20 Gbps

by using the same hardware platform. As a result, you can meet all your business growth needs, improve uptime and meet SLA for your mission critical applications. Consequently, not only are business requirements met, but it is accomplished with a simple license upgrade.

Armed with Radware's APSolute OS "application aware" functionality, OnDemand Switch offers the broadest functionality in the application delivery market. You can add additional, advanced services by simply applying a new license. The APSolute OS service architecture extends:

- Health monitoring and traffic redirection capabilities for real-time identification of service failures
- Load balancing for optimized management of traffic flows across the enterprise
- Bandwidth management for policy-driven service prioritization
- Application acceleration for offloading servers and optimizing content delivery through SSL offloading, TCP multiplexing, compression and caching
- Intrusion prevention and DoS protection to safeguard networks and resources
- Application performance monitoring to analyze real-time traffic and pinpoint performance degradations.

OnDemand Switch delivers a wide range of APSolute advanced services addressing data-centers' most prominent challenges, with no compromise on performance.

On Demand Investment Protection

OnDemand Switch provides seamless scalability during on-going IT operations. Typically, scaling up an infrastructure implies hardware replacements. No more. OnDemand Switch provides a hassle-free upgrade with no downtime, eliminating large-scale upgrade projects that are required every time you max out the capacity of your switches. OnDemand Switch eliminates the need to design, test, stage, install and debug a new hardware device, thus significantly reducing the high costs and time typically associated with scaling your environment. Thanks to its throughput and services scalability, OnDemand Switch dramatically extends the life-time of the hardware platform. By leveraging the extendable throughput license, your infrastructure investment is protected as you pay only for the performance you need today and easily scale when you need more. As a result, there is also no need to pay up front for future capacity needs. This provides you with superior cost effectiveness and lowers your overall total cost of ownership (TCO).

On Demand Operations Simplicity

OnDemand Switch reduces data center operations complexity and related costs thanks to its hassle-free scalability, outstanding reliability and standard, unified platform that is suitable for all throughput levels. Therefore, the entire operational environment can be standardized on one type of switching platform resulting in more efficient operational processes. This also generates significant savings in terms of training and the inventory carried for spare and backup devices.

Additional Benefits

Carrier-Grade Reliability

OnDemand Switch delivers carrier-grade reliability and performance required by the most demanding carrier application environments. It features a reliable, custom-made hardware coupled with embedded components providing high MTBF. OnDemand Switch is NEBS ready and it also complies with the strictest regulations and is certified by the most up-to-date hardware standards. In addition, OnDemand Switch provides dependable, dual AC/DC power supply.

Guaranteed Availability & Secured Management

OnDemand Switch provides continuous guaranteed availability of remote management even under extreme utilization conditions. As the two redundant management ports use a separate, out-of-band management data path, the management traffic is not affected by the data traffic. For enhanced security, the management ports are isolated from the traffic ports. Moreover, the management ports can work in a redundant mode for high availability.

Enhanced Configuration

OnDemand Switch allows for easy installation, recovery and upgrade of its software as well as configuration back-up for enhanced management. It also features a convenient LCD Panel for display of key performance statistics.

On Demand Innovation

OnDemand Switch Layer 4-7 operations are powered by a state-of-the-art hardware architecture for optimized resource utilization, maximum application performance, top reliability and superior manageability.

The E.U.T. was tested with power supply M/N DMRW-5500V4V, manufactured by ZIPPY.

7. List of Test Equipment

7.1 Emission Tests

The equipment indicated below by an “X” was used for testing Conducted Emission (**CE**) and Radiated Emission (**RE**)

Test equipment calibration is in accordance with ITL Q.A. Procedure PM 110 "Calibration Control Procedure", which complies with ISO 9002 and ISO/IEC Guide 17025.

Instrument	Manufacturer	Model	Serial No.	Used in Test	
				CE	RE
LISN	EMCO	3810/2BR	1297		
Transient Limiter	HP	11947A	3107A03041		
RF Amplifier	HP	8447F	3113A06386		X
Current Probe	FCC	F51	163		
EMI Receiver	HP	8546A	3650A00365		X
Receiver RF Filter Section	HP	85460A	3650A00365		X
EMC Analyzer	HP	HP8593	3536A00120		X
Biconilog Antenna	EMCO	3142B	1250		X
Horn Antenna	ETS	3115	6142		X
Antenna Mast	ETS	2070-2	9608-1497		X
Turntable	ETS	2087	-		X
Mast & Table Controller	ETS/EMCO	2090	9608-1456		X

8. Radiated Emission

8.1 Test Specification

30-12500 MHz, FCC Part 15, Subpart B, CLASS A

8.2 Test Procedure

The E.U.T operation mode and test set-up are as described in section 7.1.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The effect of varying the position of the cables was investigated to find the configuration that produces maximum emission. The configuration tested is shown in *Figure 3. Radiated Emission Test*.

The E.U.T. highest frequency source or used frequency is 2.5 GHz.

The frequency range 30-12500 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 – 12.5 GHz, a spectrum analyzer including a low noise amplifier was used. The test distance was 3 meters. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The field strength is calculated directly by the EMI Receiver software, and a “Correction Factors” data disk, using the following equation:

$$FS = RA + AF + CF$$

Where:

FS: Field strength [dB μ V/m]

RA: Receiver Amplitude [dB μ V]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

8.3 Test Results

The E.U.T met the requirements of the FCC Part 15, Subpart B ,Class A specification.

The margin between the emission level and the specification limit is 5.4 dB in the worst case at the frequency of 80.00 MHz, horizontal polarization.

The details of the highest emissions are given in *Figure 2*.

Radiated Emission

E.U.T Description Network Switch
Type OnDemand Switch 3-XL DC
Serial Number: 21902462

Specification: FCC Part 15, Subpart B, Class A

Antenna Polarization: Horizontal/Vertical Frequency range: 30 MHz to 12500 MHz
Antenna: 3 meters distance Detectors: Peak, Quasi-peak

Frequency	Peak Amp	QP Amp	Antenna Polarization:		Limit	Margin
(MHz)	dBμV/m	dBμV/m	Hor.	Ver.	dBμV/m	(dB)
250.04	36.5	33.7	X		49.5	-23.2
80.00	45.1	44.1	X		49.5	-5.4
60.06	25.8	17.2	X		49.5	-32.3
322.30	43.6	43.4		X	56.9	-13.5
625.05	40.3	38.3		X	56.9	-18.6
562.55	42.6	42.3		X	56.9	-14.6

Figure 2. Radiated Emission. Antenna Polarization: HORIZONTAL/VERTICAL.

Detectors: Peak, Quasi-peak


Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

9. Set Up Photographs



Figure 3. Radiated Emission Test

10. Signatures of the E.U.T's Test Engineers

Test	Test Engineer Name	Signature	Date
Radiated Emissions	D. Yadidi		17.03.10

11. APPENDIX A - CORRECTION FACTORS

11.1 Correction factors for

CABLE

from EMI receiver
to test antenna
at 3 AND 10 meter range.

FREQUENCY	CORRECTION FACTOR	FREQUENCY	CORRECTION FACTOR
(MHz)	(dB)	(MHz)	(dB)
30	1.96	700	11.25
35	2.08	800	12.53
40	2.26	900	13.86
45	2.43	1000	14.86
50	2.59	1200	15.7
55	2.65	1400	17.05
60	2.86	1600	18.2
65	2.96	1800	19.4
70	3.04	2000	21.3
75	3.27		
80	3.41		
85	3.54		
90	3.68		
95	3.77		
100	3.93		
110	4.19		
120	4.41		
130	4.6		
140	4.83		
150	5.06		
160	5.35		
170	5.57		
180	5.7		
190	5.84		
200	6.02		
250	6.86		
300	7.59		
350	8.09		
400	8.7		
450	9.15		
500	9.53		
550	9.82		
600	10.24		
650	10.74		

NOTES:

1. The cable type is RG-214/U

11.2 Correction factors for GAIN

Amplifier 8447F 30M-1.3G

FREQUENCY (MHz)	GAIN (dB)
20	27.16
30	27.18
50	27.15
100	27.01
200	26.48
500	27.54
1000	26.96
1100	26.69
1200	26.28
1300	25.85

11.3 Correction factors for

Bilog ANTENNA

Model: 3142

Antenna serial number: 1250

3 meter range

FREQUENCY	AFE	FREQUENCY	AFE
(MHz)	(dB/m)	(MHz)	(dB/m)
30	18.4	1100	25
40	13.7	1200	24.9
50	9.9	1300	26
60	8.1	1400	26.1
70	7.4	1500	27.1
80	7.2	1600	27.2
90	7.5	1700	28.3
100	8.5	1800	28.1
120	7.8	1900	28.5
140	8.5	2000	28.9
160	10.8		
180	10.4		
200	10.5		
250	12.7		
300	14.3		
400	17		
500	18.6		
600	19.6		
700	21.1		
800	21.4		
900	23.5		
1000	24.3		

11.4 Correction factors for

Horn ANTENNA

Model: 3115

Antenna serial number: 6142

3 meter range

FREQUENCY	Antenna Factor	FREQUENCY	Antenna Factor
(MHz)	(dB/m)	(MHz)	(dB/m)
1000	23.9	10500	38.4
1500	25.4	11000	38.5
2000	27.3	11500	39.4
2500	28.5	12000	39.2
3000	30.4	12500	39.4
3500	31.6	13000	40.7
4000	33	14000	42.1
4500	32.7	15000	40.1
5000	34.1	16000	38.2
5500	34.5	17000	41.7
6000	34.9	17500	45.7
6500	35.1	18000	47.7
7000	35.9		
7500	37.5		
8000	37.6		
8500	38.3		
9000	38.5		
9500	38.1		
10000	38.6		

12. APPENDIX B - MEASUREMENT UNCERTAINTY

12.1 Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

12.2 Conducted Emission

The uncertainty for this test is ± 2 dB.

13. Appendix C - FCC Verification Process Instructions

- Label

Prepare Label

- Design a FCC compliance label that will be affixed to all units marketed.
- The label must include the compliance statement below.

Example of Label:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Note - The label may also contain other information, such as the model number, the country of origin, etc. (The country of origin information is required by Customs and the Federal Trade Commission for imports to the U.S.)

Small Products:

If the product is too small for a label containing the statement above, the information paragraph required must be placed in a prominent location in the instruction manual or, alternatively, the information can be placed on the container in which the product is marketed.


- **Label**

The FCC requires that the compliance statement above be placed in a “conspicuous location on the device.”

The following are the FCC Rules about how the label will be permanently attached.:

The label is expected to last the life of the product. It must be permanently marked (etched, engraved, indelibly printed, etc.) either directly on the device, or on a tag that is permanently affixed (riveted, welded, etc.) to the device.

Example of Product with Label:

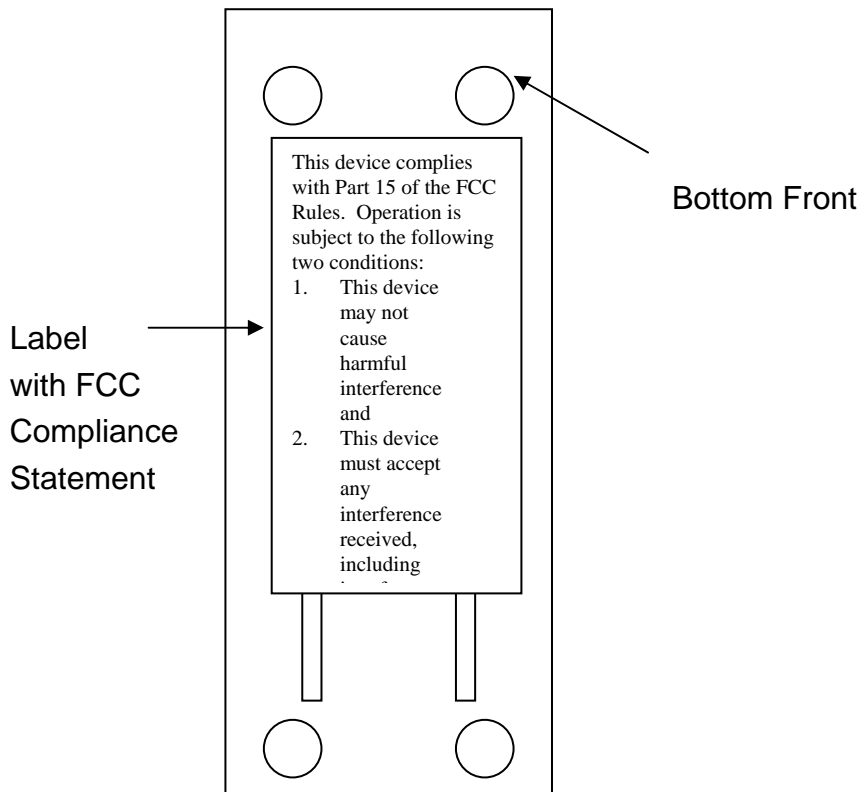

- **FCC Compliance Statement**

FCC Compliance Statement in User's Manual

For a Class A or Class B digital device or peripheral, the instructions given to the user shall include the following, or a similar, statement that should be placed in a prominent location in the text of the manual. (from FCC Rules 15.105)

The user's manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. (from FCC Rules 15.21)

Information about any special accessories needed to ensure FCC compliance must also be included.

Sample User Information for a Class A digital device:

The FCC Wants You to Know

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.

FCC Warning

Modifications not expressly approved by the manufacturer could void the user authority to operate the equipment under FCC Rules.

Sample User Information for a Class B digital device:

The FCC Wants You to Know

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- a) Reorient or relocate the receiving antenna.
- b) Increase the separation between the equipment and receiver.
- c) Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- d) Consult the dealer or an experienced radio/TV technician.

FCC Warning

Modifications not expressly approved by the manufacturer could void the user authority to operate the equipment under FCC Rules.